

GBA/3190



PCT/GB 2004/000130



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 24 AUG 2004

WIPO PCT

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 10 August 2004

BEST AVAILABLE COPY

Patents Form 1/77

Patent 1977
(Rule 10)

The
Patent
Office

1177
28 JUL 03 E825594-1 D02769
P01/7760 0.00-0317530.4

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
L
26 JUL 2003
NEWPORT

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

IP/P7294

2. Patent application number

(The Patent Office will fill in this part)

0317530.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

QINETIQ LIMITED

Registered Office 85 Buckingham Gate
London SW1B 6PD
United Kingdom

Patents ADP number (if you know it)
If the applicant is a corporate body, give the country/state of its incorporation

8307431001
GB

4. Title of the invention

OPTICAL CIRCUIT FOR A FIBRE AMPLIFIER

5. Name of your agent (if you have one)

P DAVIES et al

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

QINETIQ LIMITED
IP Formalities
A4 Bldg
Cody Technology Park
Ively Road
Farnborough
Hants GU14 0LX United Kingdom

Patents ADP number (if you know it)

8183873005

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES (b)

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form	0
Description	14
Claim(s)	4
Abstract	1
Drawing(s)	1.1

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	5
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	0

11. I / We request the grant of a patent on the basis of this application.

Signature


P DAVIES

Date
24.7.03

12. Name and daytime telephone number of person to contact in the United Kingdom
Linda Bruckshaw 01252 392722

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have attached 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

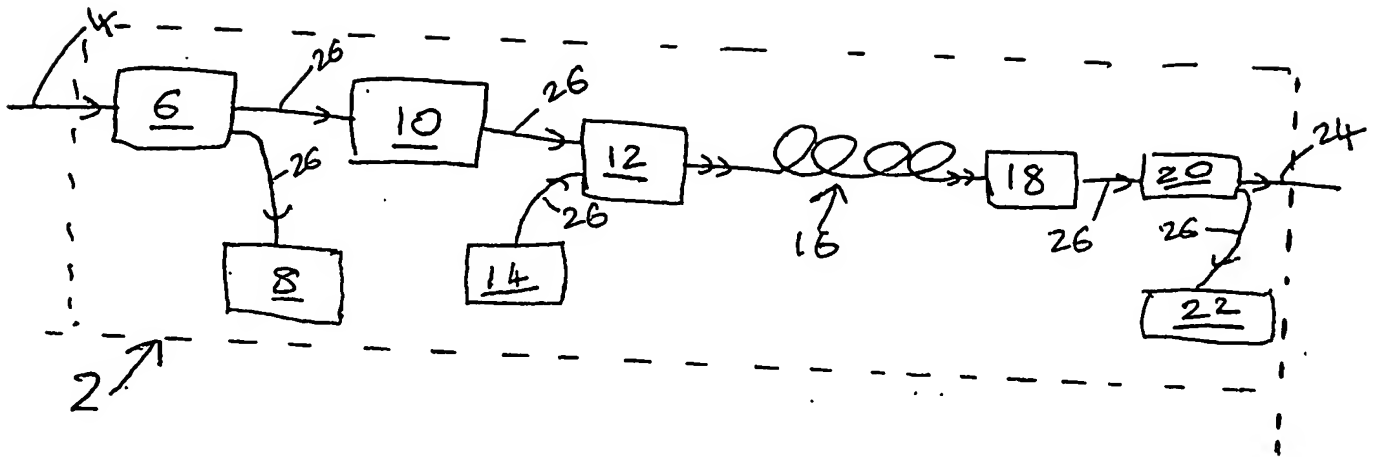


FIGURE 1

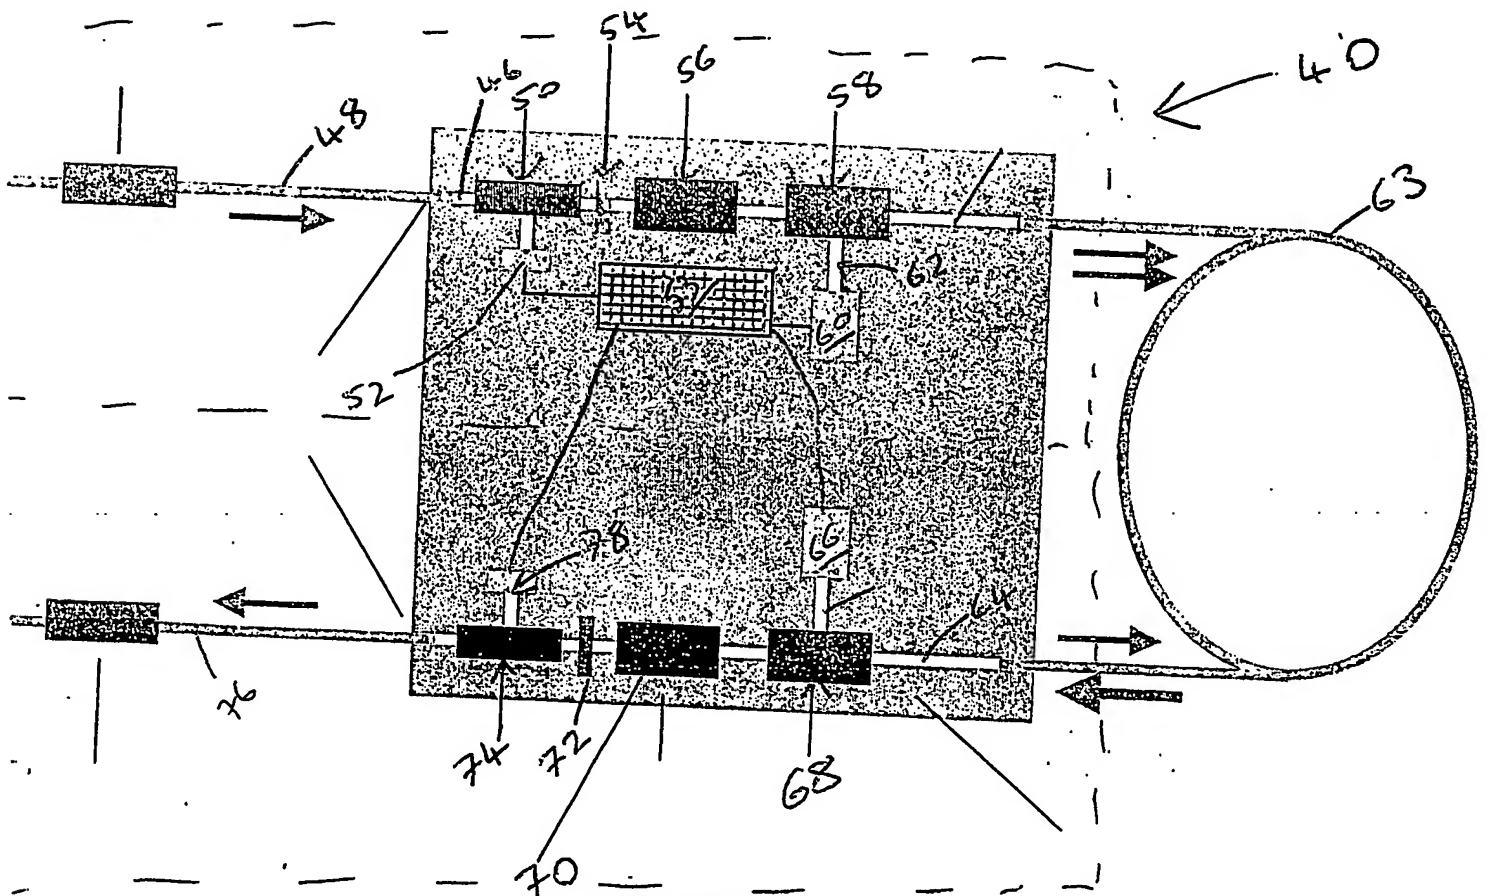


FIGURE 2

Spur

OPTICAL CIRCUIT FOR A FIBRE AMPLIFIER.

The present invention relates to an optical circuit for a fibre amplifier, and more particularly to an erbium doped fibre amplifier (EDFA).

5

Erbium doped fibre amplifiers are known. A typical EDFA comprises a number of optical components that are arranged such that a signal beam (e.g. of wavelength 1550nm) and a pump beam (e.g. of wavelength 980nm) are combined and coupled into an erbium doped optical fibre. The pump beam is selected so as to cause amplification of the signal beam within the erbium doped fibre.

10

EDFA circuits have previously been implement using optical components rigidly held in place with light coupled between them in free space. However, maintaining the necessary alignment of such components can prove difficult especially when the arrangement is subjected to mechanical shock. It is also known, and more common in the art, to optically couple the required optical components together using lengths of optical fibre. Although such an implementation provides an EDFA device having increased robustness, it is difficult to make such arrangements compact. Furthermore, the optical losses associated with the various optical fibre interfaces can dramatically reduce device performance.

15

20

It is an object of the present invention to mitigate at least some of the disadvantages of prior art EDFA optical circuit arrangements.

25

30

According to a first aspect of the present invention, an optical circuit for a fibre amplifier input stage comprises a first optical waveguide for carrying a signal beam to be amplified, a second optical waveguide for carrying a pump beam, a beam combining means optically coupled to the first and second optical waveguides for producing a combined signal/pump beam, and means for optically coupling the combined signal/pump beam into an amplifying optical fibre, characterised in that the first and second optical waveguides are hollow core optical waveguides formed as channels in a substrate.

An optical circuit is thus provided which can combine a signal beam with a pump beam and couple the combined signal/pump beam into an amplifying optical fibre such as an erbium doped optical fibre. The guiding of light within hollow core waveguides formed as channels in a substrate provides a more compact and robust optical arrangement than prior art free space or optical fibre coupled systems. Furthermore, the number of fibre end reflections are reduced compared to prior art fibre coupled systems thereby decreasing the optical losses that are associated with the circuit.

10

It should be noted that when hollow core optical waveguide structures are produced, the hollow core is likely to fill with air. However, this should be seen in no way as limiting the scope of this invention. The hollow core may contain any fluid (for example a liquid or an inert gas such as nitrogen) or be a vacuum. The term hollow core simply means a core which is absent any solid material. Furthermore, the terms "light" and "optical" are used herein to refer to any electromagnetic radiation having a wavelength from the deep ultraviolet to the far infra-red.

15

Conveniently, the beam combining means is formed monolithically from the substrate. Alternatively, the beam combining means is a discrete component held in an alignment slot formed in the substrate.

20

Advantageously, the optical circuit further comprises a laser source arranged to couple a pump beam into the second hollow core optical waveguide. The laser may be a discrete component held in alignment in a slot formed in the substrate. Alternatively, if the substrate is formed from an appropriate material the laser source may be formed monolithically from the substrate.

25

Conveniently, first optical fibre attachment means are provided to receive an input optical fibre, the first optical fibre attachment means being arranged such that any signal beam carried by an attached input optical fibre is coupled into the first hollow core optical waveguide. The optical fibre attachment means may comprise an

30

alignment slot or V-groove formed in the substrate and arranged to hold a solid core optical fibre in place thereby allowing optical inputs/outputs to be made to the optical circuit. Stepped optical fibre alignment slots may also be provided to hold both the buffer layer and the cladding. Spring clips or micro-grippers may also be
5 provided to secure the optical fibre in place.

The alignment of the core of a hollow core optical fibre with a hollow core waveguide of the optical circuit, achieved for example by clamping the optical fibre cladding in a alignment slot, would also be advantageous as the air core to air core
10 connection would be free from any unwanted reflections.

To provide efficient coupling between the core of an optical fibre and the hollow core waveguide of the optical circuit, the cross-section of the hollow core waveguide should be appropriate for the cross-section of the optical fibre core. In the case of
15 solid core fibres, leakage into the cladding means that the width of the mode carried by the fibre is actually greater than the core diameter; for example typically the 10µm solid core of a single mode glass fibre has a total field width of around 14µm diameter. If the mode width of the fibre is different to that of the hollow core waveguide, lensed fibres may be used so that the optical field is expanded or
20 reduced as appropriate to enable light to be coupled to/from fibres with a different size core to that of the hollow core waveguide. The hollow core waveguide of the optical circuit may also be tapered to expand/reduce the optical field as it propagates through the device. Alternatively, discrete lenses (e.g. ball or GRIN rod etc) can be located in the substrate and used to reduce/expand the optical field from a fibre end
25 as required. The lenses may carry an anti-reflection coating. Fibre ends of solid core fibres may also be anti-reflection coated to reduce optical losses.

Conveniently, at least one optical isolator is located within the optical path defined by the first hollow core optical waveguide. The provision of an optical isolator
30 ensures reflections within the optical circuit are not coupled back into the input optical fibre.

Advantageously, at least one variable optical attenuator is located within the optical path defined by the first hollow core optical waveguide. A VOA can be used to attenuate the optical power coupled into the amplifying optical fibre. This may be used to control the device output power. The VOA may also be used as a protection
5 shutter to prevent the signal beam reaching the amplifying fibre during device warm-up.

Preferably, the means for coupling the combined signal/pump beam produced by the beam combining means into an amplifying optical fibre comprises a third hollow
10 core optical waveguide formed as a channel in the substrate, the third hollow core optical waveguide being arranged to receive the combined signal/pump beam from the combining means. In other words, the combined signal/pump beam is coupled into a hollow core optical waveguide from the beam combining means. Alternatively, the combined signal/pump beam could be coupled directly into the
15 amplifying optical fibre.

Conveniently, second optical fibre attachment means are provided to receive an amplifying optical fibre, the second optical fibre attachment means being arranged to couple the combined signal/pump beam from the third hollow core optical
20 waveguide into an attached amplifying optical fibre.

Advantageously, at least one optical tap is provided to extract light from the first optical waveguide. The optical tap may advantageously be a hollow core multi-mode interference (MMI) device of the type described in GB2003/000331 and
25 GB2003/000370. The light extracted from the first optical waveguide can then be analysed. For example, light extracted from the first optical waveguide may be directed to a first photodiode thereby allowing the input optical power to be monitored. If a VOA is provided, the signal beam could be attenuated in response to the measured optical power so that a beam of the required optical power level is
30 provided. Alternatively, the power of the pump beam may be varied (e.g. by varying the electrical power supplied to the pump laser) to control amplification of the signal beam in the amplifying fibre.

According to a second aspect of the invention, an optical circuit for a fibre amplifier output stage comprises a first output optical waveguide, an optical fibre attachment means arranged to receive an amplifying optical fibre and an optical fibre attachment means arranged to receive an output optical fibre wherein light from the amplifying optical fibre is optically coupled to the output optical fibre via the first output optical waveguide, characterised in that the first output optical waveguide is a hollow core optical waveguide formed as a channel in a substrate.

10 An optical circuit for the output stage of a fibre amplifier is thus provided that couples the amplified output beam from an amplifier optical fibre into an output optical fibre via a section of hollow core optical waveguide formed in a substrate. The circuit provides a convenient way of coupling light between fibres, and overcomes the various alignment and attachment problems that are typically associated with direct fibre to fibre optical coupling.

Conveniently, a second output hollow core optical waveguide for carrying a pump beam is formed as a channel in the substrate and means are provided to optically couple the pump beam from the second output hollow core optical waveguide into an amplifying fibre via the first output hollow core optical waveguide. A laser source may also be arranged to couple a pump beam into the second output hollow core optical waveguide. In this manner, backwards pumping of the amplifying fibre can be implemented thereby increasing the maximum possible amplification.

25 Conveniently, an optical isolator is provided within the optical path defined by the first output hollow core optical waveguide.

At least one optical tap may advantageously be provided within the optical path defined by the first output hollow core optical waveguide. The tapped off optical power may be directed to a second photodiode, thereby enabling the optical power output of the amplifier to be monitored.

Conveniently, at least one optical filter is provided within the optical path defined by the first output hollow core optical waveguide. The provision of an optical filter ensures pump radiation is not coupled into the output optical fibre.

- 5 Any of the various optical components described above (lasers, filters, optical isolators etc) may be located in alignment slots formed in the substrate. The alignment slots are appropriately shaped to accept the component and may thus be deeper/shallower and/or wider/narrower than the various hollow core optical waveguides as necessary. Spring clips or micro-grippers may be used to secure the
10 components in place.

- Furthermore, the alignment slot may also be fabricated with sufficient accuracy to align the optical component that it receives. Placing an optical component in such an alignment slot will thus inherently align the optical component and a component
15 alignment or adjustment step is not required. In other words, the present invention may provide passive alignment of optical components instead of requiring an active alignment step in which the position of a component is adjusted (e.g. by hand) until the desired alignment is achieved. Conventional pick and place techniques of the type used in the manufacture of electronic circuits and the like could be used to
20 place the optical components in the associated alignment slot. Alternatively, pick and place techniques may provide the necessary alignment. For example, a component could be accurately aligned when placed and then fixed (e.g. glued) to remain in alignment.

- 25 The alignment slots and (especially) the optical components are manufactured with a certain size tolerance. The coupling efficiency between a optical component and an associated hollow core optical waveguide will reduce as the angular error of alignment of the optical component with respect to the hollow core waveguide increases. However, reduction of the cross-sectional dimensions of the hollow core
30 waveguide will increase the acceptable angular alignment tolerance, albeit at the expense of slightly increased losses in the optical waveguide due to the reduced core dimensions and increased (tighter) lateral alignment tolerances. Therefore,

knowledge of the alignment tolerances that will be achieved with a certain optical component (e.g. from knowledge of the manufacturing tolerances of the optical component) will permit the dimensions of the hollow core waveguide to be selected to ensure a high coupling efficiency.

5

According to a third aspect of the invention, an optical circuit for a fibre amplifier comprises an optical circuit for a fibre amplifier input stage according to the first aspect of the invention and an optical circuit for a fibre amplifier output stage according to the second aspect of the invention. In this manner, a complete optical
10 circuit for a fibre amplifier is provided. The input and output stages of the optical circuit may advantageously be formed on a single substrate thereby providing a compact and robust optical arrangement.

Advantageously, the optical circuits described above may be formed in a substrate
15 comprising semiconductor material. Semiconductor substrates, such as Silicon, can conveniently be etched to provide hollow core waveguides with high accuracy using micro-fabrication techniques. The substrate may advantageously comprise a multiple layer wafer; for example SiGe, silicon-on-insulator (SOI), silicon-on-glass or GaAs-on-silicon. A person skilled in the art would recognise that micro-fabrication
20 techniques typically involve a lithography step to define a pattern, followed by an etch step to transfer the pattern in to one or more layers on, or in, the substrate material. The lithography step may comprise photolithography, x-ray or e-beam lithography. The etch step may be performed using ion beam milling, a chemical etch or a dry plasma etch. Advantageously, the optical circuit is formed by deep
25 reactive ion etching (also termed a deep dry etch or a deep silicon etch). Micro-fabrication techniques of this type are also compatible with various layer deposition techniques such as sputtering, CVD and electro-plating.

Although substrates that comprise semiconductor material can advantageously be
30 used, the device could also be formed on a variety of alternative substrate. For example, quartz, silica or glass substrates could be used. Conveniently, the substrate used in the present invention can readily have semiconductor processing techniques

applied thereto. It should be noted that although semiconductor processing techniques are, by definition, developed for use with semiconductor substrates they may also be advantageously applied to certain non-semiconductor substrates where the semiconductor properties of the substrate are not required.

5

Advantageously, the hollow core optical waveguides of the device have a substantially rectangular (which herein shall include square) cross-section. A square, or almost square, cross-section hollow core waveguide provides a waveguide in which the losses are substantially polarisation independent and is preferred when the polarisation state of the light is unknown or varying. Dimensioning the waveguide to have a depth greater than its width increases polarisation dependent losses, but may be advantageous when the polarisation state of light propagating through the waveguide is known. Although rectangular cross-section waveguides are convenient, many alternative waveguide shapes could be employed. For example, circular, elliptical or v-shaped waveguides could be provided.

15

Advantageously, the hollow core optical waveguides are dimensioned to preferentially guide radiation propagating in the fundamental mode (i.e. higher order mode are attenuated by the waveguide). Alternatively, the hollow core optical waveguides may be arranged to support the propagation of multiple modes but the optical circuit arranged such that light is coupled into the waveguides in a manner which excites only the fundamental mode thereof.

20

Conveniently, the internal surfaces of the hollow core optical waveguides carry a reflective coating. The material providing the reflective coating may be a layer of metal such as gold, silver or copper. Metals will exhibit a suitably low refractive index over a wavelength range that is governed by the physical properties of the metal; standard text books such as "the handbook of optical constants" by E. D. Palik, Academic Press, London, 1998, provide accurate data on the wavelength dependent refractive indices of various materials. In particular, gold has a refractive index less than that of air at wavelengths within the range of around 500nm to 2.2 μ m; this encompasses wavelengths within the important telecommunications

25

30

band of 1400nm to 1600nm. Copper exhibits a refractive index less than unity over the wavelength range of 560nm to 2200nm, whilst silver has similar refractive index properties over a wavelength range of 320nm to 2480nm.

- 5 A layer of metal may be deposited using a variety of techniques known to those skilled in the art. These techniques include sputtering, evaporation, chemical vapour deposition (CVD) and (electro or electro-less) plating. CVD and plating techniques allow the metal layers to be deposited without significant direction dependent thickness variations. Sputtering using a rotating sample and/or source would also
10 provide more even coverage. Plating techniques are especially advantageous as they permit batch (i.e. multi-substrate parallel) processing to be undertaken. In particular, electro-less plating is preferred for conformality.

- A skilled person would recognise that adhesion layers and/or barrier diffusion layers
15 could be deposited prior to depositing the layer of metal. For example, a layer of chrome or titanium could be provided as an adhesion layer prior to the deposition of gold. A diffusion barrier layer, such as platinum, may also be deposited on the adhesion layer prior to gold deposition. Alternatively, a combined adhesion and diffusion layer (such as titanium nitride, titanium tungsten alloy or an insulating
20 layer) could be used.

- The reflective coating may also be provided by a stack of layers of any one or more of metal, dielectric, or semiconductor; for example dielectric stacks or metal-dielectric stacks may be provided. The reflective properties of any multiple layer
25 stack may also be dependent, to some extent, on the properties of the material on which they are deposited. Hence, the material of the substrate may also form a base layer, and be a part of, any such multiple layer stack.

- In the case of a dielectric stack, a person skilled in the art would recognise that the
30 optical thickness of a dielectric layer(s) provides an interference effect that will determine the reflective properties of the coating. The dielectric material may be deposited by CVD or sputtering or reactive sputtering. Alternatively, a dielectric

layer could be formed by chemical reaction with a deposited metal layer. For example, a layer of silver could be chemically reacted to produce a thin surface layer of silver halide.

- 5 If a reflective coating is provided, the number of materials that can be used to form the substrate is greatly increased. For example, plastic waveguide devices may be fabricated by techniques including hot embossing or injection moulding. The technique involves forming a master. The master may be formed in semiconductor material, such as silicon, using a deep dry etch. Alternatively, the master may be
10 formed by electro deposition of layers using the LIGA or UV LIGA technique. Once the master is formed, the hollow core waveguides may be formed in a plastic substrate by stamping (i.e. pressing) or hot stamping. A master may also be fabricated which is suitable for forming a sub-master that can be used to form the hollow core waveguides in the plastic substrate. Hollow plastic waveguides can thus
15 be formed and coated with a reflective coating. The plastic hollow core waveguides that carry the reflective coating may also be formed from plastic or a polymer. For example, the hollow core waveguides could be formed using a lithographic process on a "spin-on" polymer coating (e.g. SU8 available from Microchem. Corporation)
- 20 Conveniently, the substrate comprises a base portion and a lid portion. In other words, two pieces of material may be combined to form the hollow core waveguide structures of the device. The base portion may be formed from a different material to the lid portion. This would allow, for example, the hollow core waveguide and certain optical components to be formed in a base portion (e.g. made of silicon)
25 whilst certain electronic and/or electro-optic components (e.g. photo-diode/laser etc) are formed in a GaAs lid portion. Alternatively, all the optical components and channels may be formed in the base portion whilst a substantially flat piece of material forms the lid portion; this arrangement would not require any lid/base alignment step during assembly. Such arrangements provide a convenient means of
30 producing the necessary hollow core waveguides and are described in more detail in PCT patent application GB2003/000331.

According to a fourth aspect of the invention, an optical amplifier comprises an optical circuit according to any of the first, second or third aspects of the invention. Advantageously, the amplifier further comprises an erbium doped optical fibre. Typically erbium doped optical fibres can be used to amplify radiation in the
5 wavelength range of 1525nm to 1610nm. Alternative amplifying optical fibres, for example any rare-earth-doped silica fibres, may be used. More information about such fibres can be found on page 479 of Saleh and Teich, Fundamentals of Photonics, John Wiley and Sons, 1991, ISBN 047183965-5.

10 The invention will now be described, by way of example only, with reference to the following drawings in which;

Figure 1 illustrates a prior art fibre coupled EDFA and

15 Figure 2 shows an EDFA according to the present invention.

Referring to figure 1, a prior art EDFA 2 is shown. The EDFA is arranged to receive an input signal beam having a wavelength of 1550nm via an input optical fibre 4. A first tap coupler 6 is arranged to direct a small proportion of the signal beam
20 received from the input optical fibre 4 to a first photodiode 8. The remainder of the input signal beam is directed, via an optical isolator 10, to a wavelength division multiplexer 12 where it is combined with a pump beam having a wavelength of 980nm generated by a pump laser source 14. The combined pump/signal beam is then coupled into a length of erbium doped optical fibre 16.

25

After amplification in the erbium doped optical fibre, the amplified signal beam is passed through a second optical isolator 18 and directed to a second tap coupler 20. The second tap coupler directs a small proportion of the amplified signal beam to a second photodiode 22, and the remainder of the amplified beam exits the device via
30 an output optical fibre 24.

All of the optical links between the various components of the prior art EDFA described above are provided by discrete lengths of optical fibre 26. In order to maximise optical efficiency, the fibre ends are all anti-reflection coated and fibre alignment means are provide for each discrete optical component. Although such an
5 implementation is fairly mechanically robust, the cost of packaging each of the individual optical components and providing fibre interconnects is high and the arrangement can not be readily reduced in size.

Referring to figure 2, an EDFA circuit 40 according to the present invention is
10 shown. The circuit comprises an input stage 42 and an output stage 44.

A signal beam having a wavelength of 1552nm is coupled into a first hollow core optical waveguide 46 of the input stage 42 of the EDFA circuit 40 via an input optical fibre 48. A portion of the input beam is tapped from the first hollow core
15 optical waveguide 46 by an optical tap 50 and directed to a first photodiode 52 via a further section of hollow core waveguide. The signal beam propagating through the first hollow core optical waveguide 46 is then attenuated, if required, by a variable optical attenuator (VOA) 54 before passing through an optical isolator 56 to a first multiplexer 58.

20

The first multiplexer 58 also receives a pump beam having a wavelength of 980nm from a first laser diode 60 via a second hollow core optical waveguide 62. Although not shown in figure 2, a photo-diode could also be provided to monitor pump output power. The combined pump/signal beam is then coupled into a further section of
25 hollow core waveguide and coupled therefrom into the first end of a length of erbium doped optical fibre 63. Although not shown in figure 2, the fibres may comprises lensed ends, or discrete lenses may be located in the substrate, to improve optical coupling between the hollow core waveguides of the EDFA circuit and the associated optical fibre.

30

The second end of the erbium doped optical fibre 63 is coupled to a third hollow core optical waveguide 64 formed in the output stage 44 of the circuit. In order to

maximise amplification in the erbium doped optical fibre 62, a second "backward" pump beam may also be provided that is produced by a second laser diode 66 and coupled into the third hollow core optical waveguide 64 using a second multiplexer 68. The second pump beam is arranged to propagate along the third hollow core optical waveguide 64 in the opposite direction to the amplified signal beam and is thus coupled into the erbium doped fibre 63. In this manner, the erbium doped fibre is pumped from both ends thereby increasing the level of amplification that it can provide.

The amplified signal beam received from the erbium fibre 63 propagates along the third hollow core optical waveguide and passes through the second multiplexer 68, an optical isolator 70, a line filter 72 and a second optical tap 74 before being coupled into an output optical fibre 76. The second optical tap 74 extracts a small proportion of the signal beam and directs it to a second photodiode 78.

15

In use, the input beam intensity is measured by the first photodiode 52, and the output (i.e. amplified) beam intensity is measured by the second photodiode 78. The outputs of the first and second photodiodes 52 and 78 are monitored by control circuitry 53 and the output power of the pump lasers 60 and 66 is altered accordingly to provide the required level of amplification. The VOA 54 also allows the beam to be attenuated prior to amplification if required.

The hollow waveguides of the EDFA circuit 40 are formed from a substrate having a base portion and a lid portion. Typically, alignment slots are provided in the base portion to receive the various discrete optical components of the circuit. The alignment slots may be provided with sufficient accuracy that the component self-align when placed in their respective slots. This passive alignment ensures the optical components are aligned with respect to the hollow waveguides of the substrate without the need for an active alignment step prior to component attachment. The skilled person would appreciate that certain optical structures could alternatively be formed monolithically from the substrate.

The lid portion may simply comprise a substantially flat piece of material that is attached (e.g. glued using a layer of epoxy) to the base portion in order to fully define the hollow core waveguides. Alternatively, optical components or structures (e.g. cavities corresponding to components in the base portion) may be formed in or
5 attached to the lid portion. The lid portion may also be formed from a different material to the base portion. For example, the base portion may be formed from silicon, whilst the lid portion is formed from GaAs. This would enable alignment slots to be formed in the silicon base portion whilst control electronics and/or electro-optic components (e.g. photo-diodes, lasers etc) are formed in the GaAs lid
10 portion.

A skilled person would recognise the numerous alternative optical arrangements that could be used when implementing a circuit of the present invention.

Claims.

1. An optical circuit for a fibre amplifier input stage comprising a first optical waveguide for carrying a signal beam to be amplified, a second optical waveguide for carrying a pump beam, a beam combining means optically coupled to the first and second optical waveguides for producing a combined signal/pump beam, and means for optically coupling the combined signal/pump beam into an amplifying optical fibre, characterised in that the first and second optical waveguides are hollow core optical waveguides formed as channels in a substrate.
2. An optical circuit according to claim 1 wherein the beam combining means is formed monolithically from the substrate.
3. An optical circuit according to claim 1 wherein the beam combining means is a discrete component held in an alignment slot formed in the substrate.
4. An optical circuit according to any preceding claim and further comprising a laser source arranged to couple a pump beam into the second hollow core optical waveguide.
5. An optical circuit according to any preceding claim wherein first optical fibre attachment means are provided to receive an input optical fibre, the first optical fibre attachment means being arranged such that any signal beam carried by an attached input optical fibre is coupled into the first hollow core optical waveguide.
6. A device according to any preceding claim wherein at least one optical isolator is located within the optical path defined by the first hollow core optical waveguide.
7. A device according to any preceding claim wherein at least one variable optical attenuator is located within the optical path defined by the first hollow core optical waveguide.

8. An optical circuit according to any preceding claim wherein the means for coupling the combined signal/pump beam produced by the beam combining means into an amplifying optical fibre comprises a third hollow core optical waveguide formed as a channel in the substrate, the third hollow core optical waveguide being arranged to receive the combined signal/pump beam from the combining means.

9. An optical circuit according to claim 8 wherein second optical fibre attachment means are provided to receive an amplifying optical fibre, the second optical fibre attachment means being arranged to couple the combined signal/pump beam from the third hollow core optical waveguide into an attached amplifying optical fibre.

10. An optical circuit according to any preceding claim and further comprising at least one optical tap to extract light from the first hollow core optical waveguide.

11. An optical circuit according to claim 10 and further comprising a first photodiode, wherein light extracted from the first hollow core optical waveguide is directed to the first photodiode.

12. An optical circuit for a fibre amplifier output stage comprising a first output optical waveguide, an optical fibre attachment means arranged to receive an amplifying optical fibre and an optical fibre attachment means arranged to receive an output optical fibre wherein light from the amplifying optical fibre is optically coupled to the output optical fibre via the first output optical waveguide, characterised in that the first output optical waveguide is a hollow core optical waveguide formed as a channel in a substrate.

13. An optical circuit according to claim 12 wherein a second output hollow core optical waveguide for carrying a pump beam is formed as a channel in the substrate and means are provided to optically couple the pump beam from the second output hollow core optical waveguide into an amplifying fibre via the first output hollow core optical waveguide.

14. An optical circuit according to claim 13 and further comprising a laser source arranged to couple a pump beam into the second output hollow core optical waveguide.
15. An optical circuit according to any one of claims 12 to 14 wherein at one optical isolator is provided within the optical path defined by the first output hollow core optical waveguide.
16. An optical circuit according to any one of claims 12 to 15 wherein at least one optical tap is provided within the optical path defined by the first output hollow core optical waveguide.
17. An optical circuit according to any one of claims 12 to 16 wherein at least one optical filter is provided within the optical path defined by the first output hollow core optical waveguide.
18. An optical circuit for a fibre amplifier comprising an optical circuit for a fibre amplifier input stage according to any one of claims 1-11 and an optical circuit for a fibre amplifier output stage according to any one of claims 12-17.
19. An optical circuit according to 18 wherein the optical circuits for the input and output stages are formed on a single substrate.
20. An optical circuit according to any preceding claim wherein the substrate comprises semiconductor material.
21. An optical circuit according to claim 20 wherein the substrate comprises a silicon on insulator (SOI) wafer.
22. An optical circuit according to any preceding claim formed by micro-fabrication techniques.

23. An optical circuit according to claim 22 wherein the micro-fabrication technique includes deep reactive ion etching.
24. An optical circuit according to any preceding claim wherein the hollow core optical waveguides are of substantially rectangular cross section.
25. An apparatus according to any preceding claim wherein the hollow core optical waveguides are dimensioned to preferably guide radiation propagating in the fundamental mode.
26. An apparatus according to any one of claims 1 to 24 wherein the hollow core optical waveguides are dimensioned to preferably guide radiation propagating in multiple optical modes.
27. An optical circuit according to any preceding claim wherein the internal surfaces of the hollow core optical waveguides carry a reflective coating.
28. An optical circuit according to any preceding claim wherein the substrate comprises a base portion and a lid portion.
29. An optical amplifier comprising an optical circuit according to any preceding claim.
30. An optical amplifier according to claim 29 and further comprising an erbium doped optical fibre.
31. An optical circuit as substantially hereinbefore described with reference to figure 2.

AbstractOPTICAL CIRCUIT FOR A FIBRE AMPLIFIER

Optical circuits for fibre amplifier input and output stages are described. The input stage circuit (42) comprises a first optical waveguide (46) for carrying a signal beam to be amplified, a second optical waveguide (62) for carrying a pump beam, a beam combining means (58) optically coupled to the first and second optical waveguides (46, 62) for producing a combined signal/pump beam, and means for optically coupling the combined signal/pump beam into an amplifying optical fibre (63). The output stage circuit (44) comprises a first output optical waveguide (64), an optical fibre attachment means arranged to receive an amplifying optical fibre (63) and an optical fibre attachment means arranged to receive an output optical fibre (76) wherein light from the amplifying optical fibre (63) is optically coupled to the output optical fibre (76) via the first output optical waveguide (64). The first and second optical waveguides (46, 62) and the first output optical waveguide (64) are hollow core optical waveguides formed as channels in a substrate. A fibre amplifier, in particular an erbium doped fibre amplifier, comprising such optical circuits is also described.

Figure 2 refers

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.